

Accessory Outdoor Grille

For Single-Package Heat Pumps:
Standard Grille, Part Number 50QT900011 or
Deluxe (Architectural) Grille, Part Number 50QT900021

INSTALLATION

Step 1 — Inspect Package Contents

Remove accessory grille from packaging and inspect for visible signs of damage. File claim with shipping company if shipment is damaged or incomplete.

CAUTION: In following steps, grasp panel or accessory grille securely when handling to prevent it from falling from sleeve, possibly causing personal injury or property damage.

Step 2 — Remove Filler Panel from Wall Sleeve


Wall sleeve is shipped with metal filler panel to protect wall sleeve and room interior during con-

struction and installation. Remove and save 8 sheet metal screws (2 in top, 3 in each side) that secure filler panel to wall sleeve. See Fig. 1.


Carefully remove filler panel. Be sure to grasp panel securely, especially when above ground floor level, to prevent panel from being dislodged by a gust of wind.

Step 3 — Install Accessory Grille in Sleeve

Grasp accessory grille securely and carefully position on outdoor flange of wall sleeve. Ensure that orifice plate is positioned at top of grille (see Fig. 2 or 3). Using the same screws and engagement holes that secured the sleeve filler panel, secure grille to sleeve.

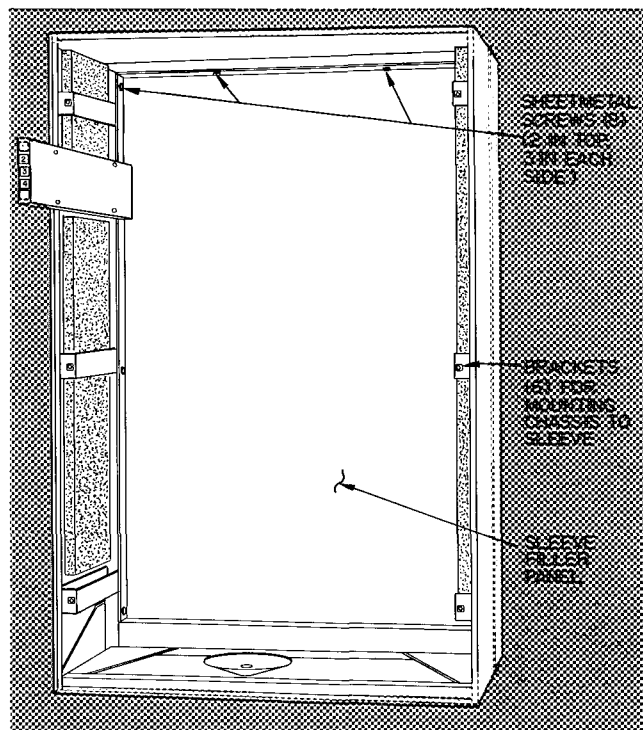

→ Fig. 1 — Wall Sleeve and Filler Panel

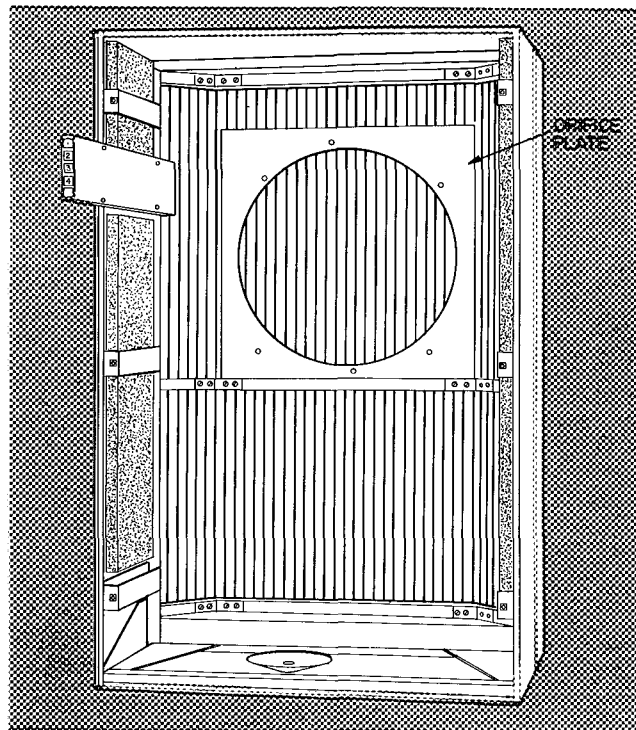

→ Fig. 2 — Deluxe Architectural Grille Installed

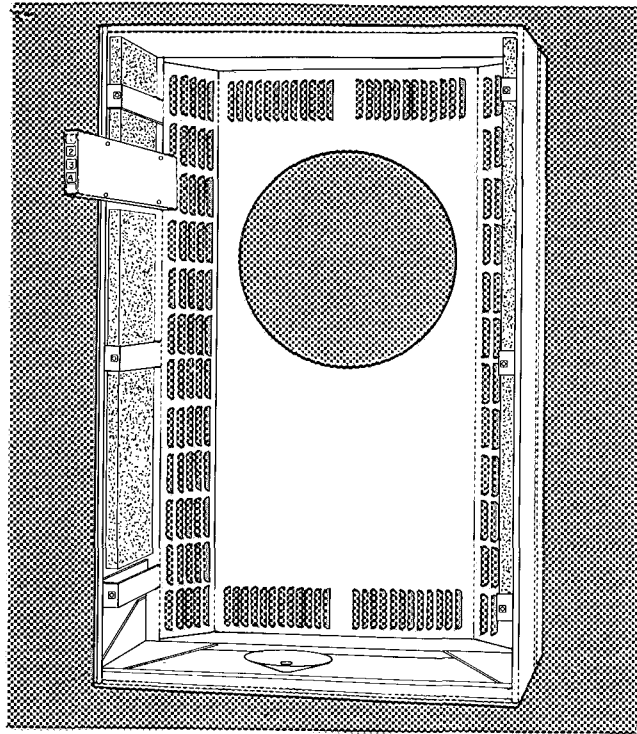


Fig. 3 — Standard Outdoor Grille

©

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations

Book	1	4
Tab	5a	5a

Form 50QT-4SI Supersedes 50QT-3SI

Printed in U S A

3-83

PC 101

Catalog No 535-090